





Available Powder Coat Colors

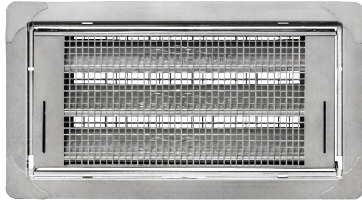


Dual Function 1540-510

Coverage 200 sq.ft	Dimensions 16"W x 8"H x 3"D
Installation Type Masonry Wall	R.O. 16.25"W x 8.25"H
Finish 316L Marine-Grade Stainless Steel	




Dual Function Stacker 1540-511

Coverage 400 sq.ft	Dimensions 16"W x 16"H x 3"D
Installation Type Masonry Wall	R.O. 16.25"W x 16.375"H
Finish 316L Marine-Grade Stainless Steel	

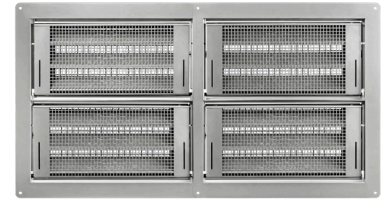

Dual Function 2x2 1540-150202E

Coverage 800 sq.ft	Dimensions 32.5"W x 16"H x 3"D
Installation Type Masonry Wall	R.O. 33"W x 16.375"H
Finish 316L Marine-Grade Stainless Steel	

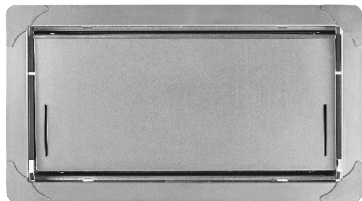

Insulated 1540-520

Coverage 200 sq.ft	Dimensions 16"W x 8"H x 3"D
Installation Type Masonry Wall	R.O. 16.25"W x 8.25"H
Finish 316L Marine-Grade Stainless Steel	



Insulated Stacker 1540-521

Coverage 400 sq.ft	Dimensions 16"W x 16"H x 3"D
Installation Type Masonry Wall	R.O. 16.25"W x 16.375"H
Finish 316L Marine-Grade Stainless Steel	



Insulated 2x2 1540-150202E

Coverage 800 sq.ft	Dimensions 32.5"W x 16"H x 3"D
Installation Type Masonry Wall	R.O. 33"W x 16.375"H
Finish 316L Marine-Grade Stainless Steel	



Insulated Wood Wall 1540-570

Coverage 200 sq.ft	Dimensions 14.5"W x 8.5"H x 3"D
Installation Type Stud Wall	R.O. 14.5"W x 8.75"H
Finish 316L Marine-Grade Stainless Steel	




Insulated Garage Door 1540-574

Coverage 200 sq.ft	Dimensions 14.5"W x 8.5"H x 3"D
Installation Type Overhead Garage Door	R.O. 14.5"W x 8.75"H
Finish Powder Coat Painted White (MG 316 SS)	



Insulated Garage Door 1540-524

Coverage 200 sq.ft	Dimensions 16"W x 8"H x 3"D
Installation Type Overhead Garage Door	R.O. 16"W x 8"H
Finish Powder Coat Painted White (MG 316 SS)	

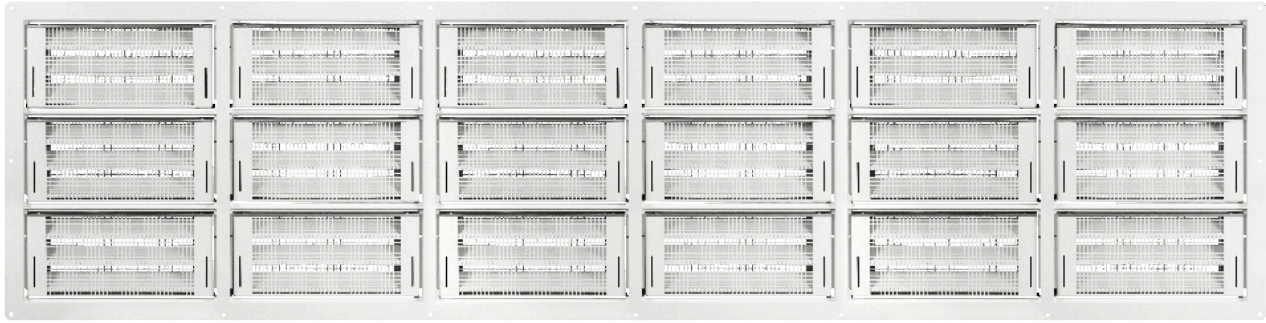

Custom Multi-Frames

Configurations ranging from 2 x 2 to 6 x 3, with coverage from 800 to 3600 sq. ft.

Vent Door Style


Insulated
1540-0239

Dual Function
1540-0039

Frame Style

Standard
18g MG 316 SS

Economy
24g MG 316 SS

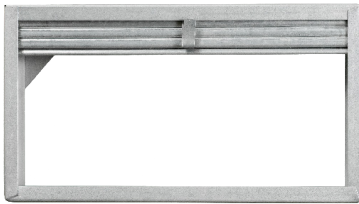

Fire Damper

Masonry

1540-530

Wood Wall

1540-537

UL-certified for 2hours available up to 2 x 3 Configuration



Trim and Sleeve

Masonry

1540-531-12
Depth: 7"-12.5"

1540-531-15
Depth: 10"-15.5"

Wood Wall




1540-573-4
Depth: 4"-6.5"

1540-573-9
Depth: 9"-11.5"



Pour-in-Place Bucks

Single, Stacker and Quad models for both Insulated and Dual-Function Vents. Various options available depending on wall depth.

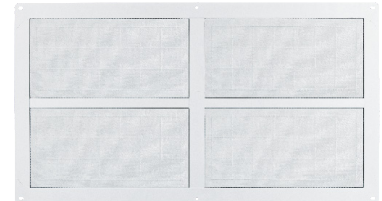

Sealing Kits

Sealing Kits work in conjunction with Insulated Smart Vent models and provide a tight, insulated seal behind the vent opening to finish off the interior space. Available in Single, Stacker or Quad models.

Available for Stackers + Quad model


Sealing Kit 1540-526

Sealing Kit Stacker 1540-526-2

Sealing Kit Quad 1540-526-4



Powder Coat Colors Available

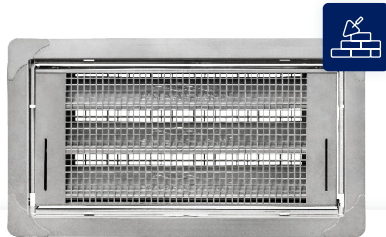

Dual Function

Coverage 200 ft²
Dimensions 16"W x 8"H x 3"D
Opening 16.25"W x 8.25"H


1540-510



Dual Function Stacker

Coverage 400 ft²
Dimensions 16"W x 16"H x 3"D
Opening 16.25"W x 16.375"H

1540-511

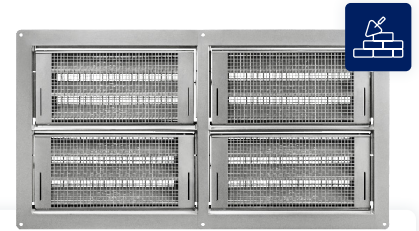

Dual Function 2 x 2

Coverage 800 ft²
Dimensions 32.5"W x 16"H x 3"D
Opening 33"W x 16.375"H

1540-150202E



Insulated

Coverage 200 ft²
Dimensions 16"W x 8"H x 3"D
Opening 16.25"W x 8.25"H

1540-520



Insulated Stacker

Coverage 400 ft²
Dimensions 16"W x 16"H x 3"D
Opening 16.25"W x 16.375"H

1540-521



Insulated 2 x 2

Coverage 800 ft²
Dimensions 32.5"W x 16"H x 3"D
Opening 33"W x 16.375"H

1540-150202E



Wood Wall

Coverage 200 ft²
Dimensions 14.5"W x 8.5"H x 3"D
Opening 14.5"W x 8.75"H

1540-520



Garage Door - Tall

Coverage 200 ft²
Dimensions 14.5"W x 8.5"H x 3"D
Opening 14.5"W x 8.75"H

1540-521



Garage Door - Wide

Coverage 200 ft²
Dimensions 16"W x 8"H x 3"D
Opening 16"W x 8"H

1540-150202E